boss door controls

EN Size 2-4

1100mm (max door width)

KG 80kg (max door weight)

GUARANTEE 25 Years

TS5.224V - Spring Adjustable, c/w Back Check

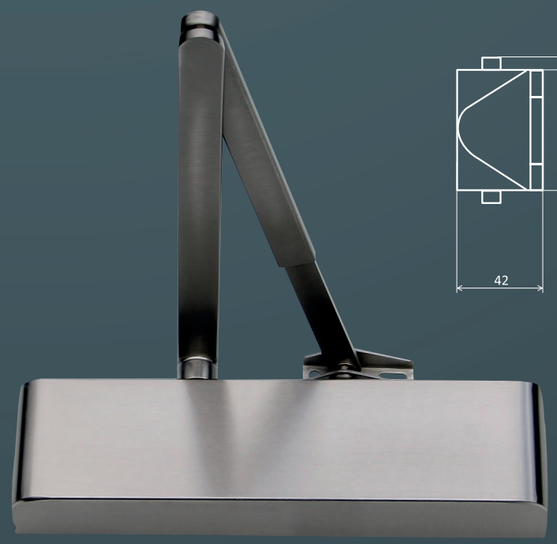

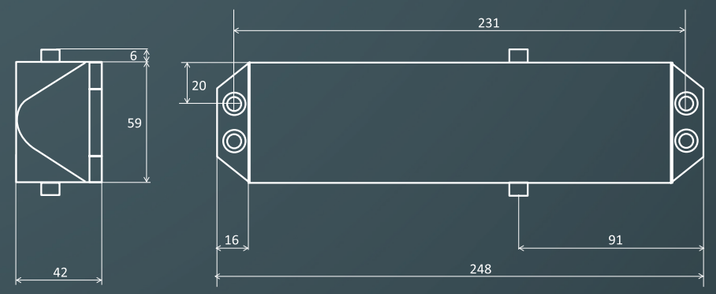

Product Overview:

An efficient, durable and stylish variable power overhead door closer. Suitable for most applications particularly those with constant use which require a backcheck function.

Testing & Standards

- CE marked against EN1154
- Included in successful fire test to EN1634
- Suitable for use on timber fire doors of up to 120 minutes fire resistance
- Safe in use
- High corrosion resistance

www.**bossdoorcontrols**.com

Specification		TS5.224V
Closing force	EN size	2-4
Door size (max)	Width (mm)	1100
	Weight (kg)	80
Door size (min)	Width (mm)	280
Body dimensions	Length (mm)	248
	Height (mm)	59
	Depth (mm)	42
Application	Pull side fig 1	✓
	Push side fig 66	✓
Mechanism	Rack & pinion	✓
Angle of opening		180°
Non handed		✓
Power adjustment by spring		✓
Adjustable sweep speed		✓
Adjustable latch speed		✓
Adjustable back check		✓

Options	TS5.224V
Hold-open arm (not suitable for use on fire doors)	✓*

Cover options	TS5.224V
Semi-radius	✓

Finish options		TS5.224V
Cover & matching sissor arm	SIL	✓
	SSS	✓
	PB	✓
	PSS	✓
	RAL/Lacquered	✓
	Special plated finishes	✓

Tested to EN1154	TS5.224V
4 8 2/4 1 1 3	- fig.1
3 8 3/4 1 1 3	- fig.66

CE certificate



UKCA certificate

Certifire certificate

Finishes



Silver

Choice of 3 brass finishes

SSS

Choice of RAL finishes

PSS

Choice of 6 bronze finishes

Cover

Semi radiused cover
L:258 x H:65 x D:44mm