# FRAMING SOLUTIONS



THE QUICK FIT POCKET DOOR SYSTEM FROM







# SINGLE

- Time Saving Pre-assembled Pocket
- Space Saving
- Simple Installation
- Suits Doors 35-44mm Thick
- · Max Weight 120kg
- Endpost, crosspieces, cassette edge covers, door brushes and seals supplied as standard

	IMPERIAL SINGLE DOOR SIZE				INSTALLATION SIZE INFORMATION						
CODE	IMPE	ERIAL	MET	TRIC		ENING SIZE DUGH AREA)	CASSETTE	STRUCTURAL	OPENING SIZE	FINISHED INTERNA (FW) 125mm 125mm 125mm	
	WIDTH (LP)	HEIGHT (HP)	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)
ST3571N	2ft 3" (27")		686mm		656mm		700	1466mm		125mm	70mm
ST3572N	2ft 6" (30")		762mm	1001	732mm	1070	750	1592mm		125mm	70mm
ST3573N	2ft 9" (33")	6ft 6" (78")	838mm	1981mm	808mm	1970mm	900	1818mm	2080mm	125mm	70mm
ST3574N	3ft (36")		914mm		884mm		900	1894mm		125mm	70mm

CODE	METRIC SING	LE DOOR SIZE	INSTALLATION SIZE INFORMATION							
	ME	TRIC	CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE	STRUCTURAL OPENING SIZE		FINISHED WALL/		
	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)	
ST3580N	626mm		600mm	2030mm	600	1310mm	2140mm	125mm	70mm	
ST3581N	726mm	20.40	700mm		700	1510mm		125mm	70mm	
ST3582N	826mm	2040mm	800mm		800	1710mm		125mm	70mm	
ST3583N	926mm		900mm		900	1910mm		125mm	70mm	

#### DIMENSION DIAGRAM



#### ACCESSORIES AND FEATURES







\* One required per door






## DOUBLE DOOR

	IMPERIAL DOUBLE DOOR SIZE				INSTALLATION SIZE INFORMATION						
CODE	IMPE	RIAL	ME	TRIC		ENING SIZE DUGH AREA)	CASSETTE	STRUCTURAL	OPENING SIZE	FINISHEI	
	WIDTH (LP)	HEIGHT (HP)	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)
ST3576N	2ft 3" (27")		686mm		1312mm		700	2832mm		125mm	70mm
ST3577N	2ft 6" (30")	64 GH (76H)	762mm		1464mm		750	3084mm		125mm	70mm
ST3578N	2ft 9" (33")	6ft 6" (78")	838mm	1981mm	1616mm	1970mm	900	3536mm	2080mm	125mm	70mm
ST3579N	3ft (36")		914mm		1768mm		900	3688mm		125mm	70mm

CODE	METRIC DOUB		INSTALLATION SIZE INFORMATION							
	ME	TRIC	CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE	STRUCTURAL OPENING SIZE		FINISHED WALL/ INTERNAL SPACE		
	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)	
ST3585N	626mm		1200mm	2030mm	600	2520mm	2140mm	125mm	70mm	
ST3586N	726mm	2040	1400mm		700	2920mm		125mm	70mm	
ST3587N	826mm	2040mm	1600mm		800	3320mm		125mm	70mm	
ST3588N	926mm		1800mm		900	3720mm		125mm	70mm	

#### DIMENSION DIAGRAM



#### ACCESSORIES AND FEATURES





\* One required per door



#### **Double Simultaneous Opening & Closing System** Max Door Weight 35kg

Door Sizes Imperial/Metric DT3231 (to suit ST3576N) DT3232 (to suit ST3577N) DT3232 (to suit ST3578N) DT3234 (to suit ST3578N) DT3220 (to suit ST3598N) DT3220 (to suit ST3586N) DT3222 (to suit ST3586N) DT3222 (to suit ST3587N) DS3223 (to suit ST3588N)



Jamb Kit Double Door White melamine **36537** Unfinished **36845** For double systems only





# SINGLE FIRE DOOR

INFORMATION

- FD 30 Fire Rated System
- Time Saving Pre-assembled Pocket
- Space Saving
- Simple Installation
- Suits Fire Doors 40 44mm Thick
- Max Weight 120kg
- · Architrave free edgeless system

CODE	IMPERIAL SINGLE DOOR SIZE				INSTALLATION SIZE INFORMATION							
	IMPERIAL		METRIC		CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE	STRUCTURAL OPENING SIZE		FINISHED WALL/ INTERNAL SPACE		
	WIDTH (LP)	HEIGHT (HP)	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)	
FM35110002N	2ft 3" (27")		686mm		656mm		700	1490mm	2080mm	125mm	69mm	
FM35110003N	2ft 6" (30")	CA CH (70H)	762mm	1001	732mm		750	1616mm		125mm	69mm	
FM35110004N	2ft 9" (33")	6ft 6" (78")	838mm	1981mm	808mm	1970mm	900	1792mm		125mm	69mm	
FM35110005N	3ft (36")		914mm		884mm	i i	900	1918mm		125mm	69mm	

CODE	METRIC SING	LE DOOR SIZE	INSTALLATION SIZE INFORMATION							
	ME	TRIC	CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE STRUCTURAL OPEN		OPENING SIZE	NING SIZE FINISHED WA		
	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)	
FM350I0003N	726mm		696mm		700	1530mm	2140mm	125mm	69mm	
FM350I0004N	826mm	2040	796mm	2030mm	800	1730mm		125mm	69mm	
FM350I0005N	926mm	2040mm	896mm	2030mm	900	1930mm		125mm	69mm	
FM350I0006N	1026mm		996mm		1000	2130mm		125mm	69mm	

#### DIMENSION DIAGRAM



#### ACCESSORIES AND FEATURES





Slow - Damper Unit\* Max Door Weight 35kg Product Code 35175





Automatic Self Closing Kit for FD30\*\*

**Product Code 35173** 



BS 476-22: 1987 30 Minute Fire Test

When fitted with a FD30 Fire Door

- \* One required per door
- \*\* Required to Adhere to UK fire door regulations



#### QUICK FIT POCKET DOOR SYSTEMS

**Scrigno** is the market leader in the production and sale of frames for concealed sliding doors. Their pre-assembled cassette complete with timber components reduces installation time and simplifies the installation process.

#### WHY USE POCKET DOORS

Pocket doors are designed to remove the unusable space within buildings. By removing the footprint created by traditional hinged doors, users can make the most of their space.

With a typical space saving of 2.6m<sup>2</sup> per door compared to hinged doors, pocket doors are fast becoming the ideal solution where space is at a premium.

Pocket Door Systems are ideal for: Living areas, en-suites, office spaces and cloakrooms.

#### THE CASSETTE SYSTEM

**Cassette / Pocket** - Made from 0.5mm galvanised steel on the sides and 0.8mm on the top and bottom profile sections.

The cassette sides are formed using a single piece of pressed steel and the corrugations spaced from 10mm apart give the cassette excellent rigidity.

**Horizontal Profile Sections** - Further reinforce the structure and allow plasterboard to be fixed directly to the cassette.

**Space Bars** - Provided to be used during installation. These slot into the wooden jamb and cassette to ensure they are kept in alignment.

#### **EASY 5 STEP INSTALLATION**

- 1. Insert aluminium track
- 2. Attach jamb and space bars
- 3. Fix to studwork
- 4. Apply plasterboard and plaster
- 5. Insert door





### GLASS DOOR

CONVERSION KIT

- Available for Single and Double Systems
- · Works with the Scrigno Stech Range
- Suitable for glass doors 8mm 10mm thick
- Max Door Weight 120kg
- Can be Retro-Fitted
- Additional Jamb kit supplied Finished (White Melamine)

This kit enables new or existing Scrigno Pocket Doors to be converted into a glass pocket door system. Glass is increasing in popularity due to its modern look and the ability to allow more light to travel between space in your building or home.

Scrigno manufacture the pocket door system, glass is purchased separately through approved or recommended distributors.

The unique Scrigno conversion kit is adjustable from 8-10mm glass thickness. The high quality clamps hold the glass in place without having to drill through, making the glass doors more cost effective and installation faster.

#### ACCESSORIES AND FEATURES



Glass Conversion Kit Product Code 34717




Jamb Kit White melamine 34340 For glass systems only



Tube - 34619 Quadra - 34622 3m Adhesive Designer Levers: Ghost - 34718 Model A - 34719



Accessories: Slow Tech Damper Kit Product Code 36237 60 kg

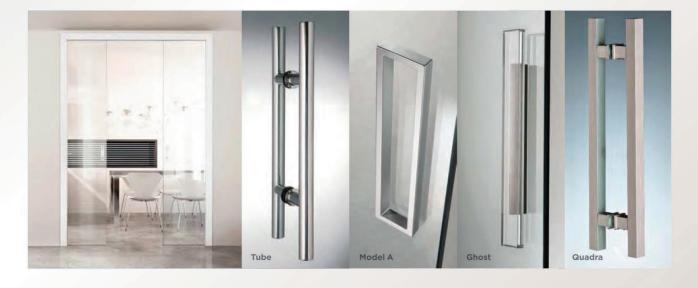



#### UK distributor:

#### **BOSS Door Controls Limited**

3 & 4 Rutherford Square, Brucefield Industry Park, LIVINGSTON, West Lothian, EH54 9BU T: 01506 467477 F: 01506 467478 W: www.bossdoorcontrols.com