



Size 3-6



1400mm  
(max door width)





120kg  
(max door weight)



25 Years

## TS5.226 - Spring Adjustable, c/w Back Check

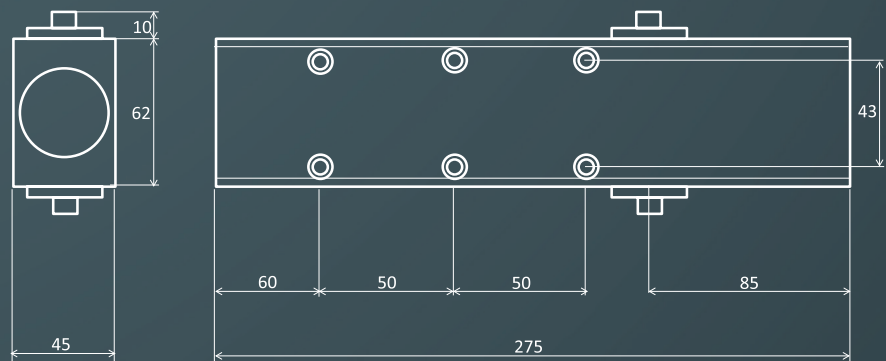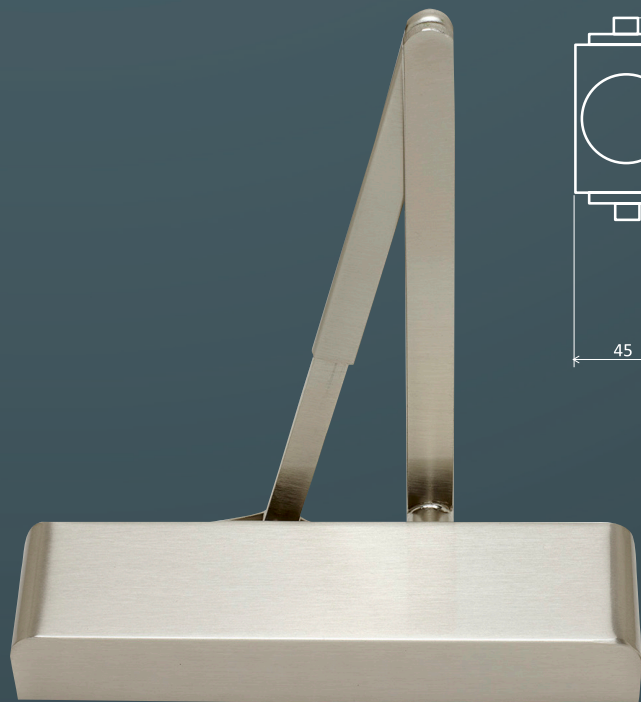

### Product Overview:

A high power, durable and stylish variable power overhead door closer. Suitable for most heavy duty applications particularly those requiring a greater closing force. Regularly specified for outward opening external doors.

### Testing & Standards

- CE marked against EN1154
- Included in successful fire test to EN1634
- Suitable for use on timber fire doors of up to 120 minutes fire resistance
- Safe in use
- High corrosion resistance

Specification		TS5.226
Closing force (Fig 1)	EN size	3-6
Door size (max)	Width (mm)	1400
	Weight (kg)	120
Door size (min)	Width (mm)	???
Body dimensions	Length (mm)	275
	Height (mm)	62
	Depth (mm)	45
Application	Pull side fig 1	✓
	Push side fig 66	✓*
	Transom fig 61	✓*
Mechanism	Rack & pinion	✓
Angle of opening		180°
Non handed		✓
Power adjustment by spring		✓
Adjustable sweep speed		✓
Adjustable latch speed		✓
Adjustable back check		✓

Options		TS5.226
Drop plate		✓*
Hold-open arm (Not suitable for use on fire doors)		✓*
Upstand bracket for over panel or UPVC doors		✓*
* these options are not covered by CE		

Cover options		TS5.226
Semi-radius		✓


Finish options		TS5.226
Cover & matching sissor arm	SIL	✓
	SSS	✓
	PB	✓
	PSS	✓
	RAL/Lacquered	✓
	Special plated finishes	✓

Tested to EN1154		TS5.226
------------------	--	---------


4 8  $\frac{3}{6}$  1 1 3 - fig.1

3 8  $\frac{3}{5}$  1 1 3 - fig.66

### CE certificate




### UKCA certificate



### Certifire certificate



### Finishes



### Cover options



Semi radiused cover  
L:270 x H:69 x D:40mm