TS5.224V Fig. 6
Left Hand Hung.

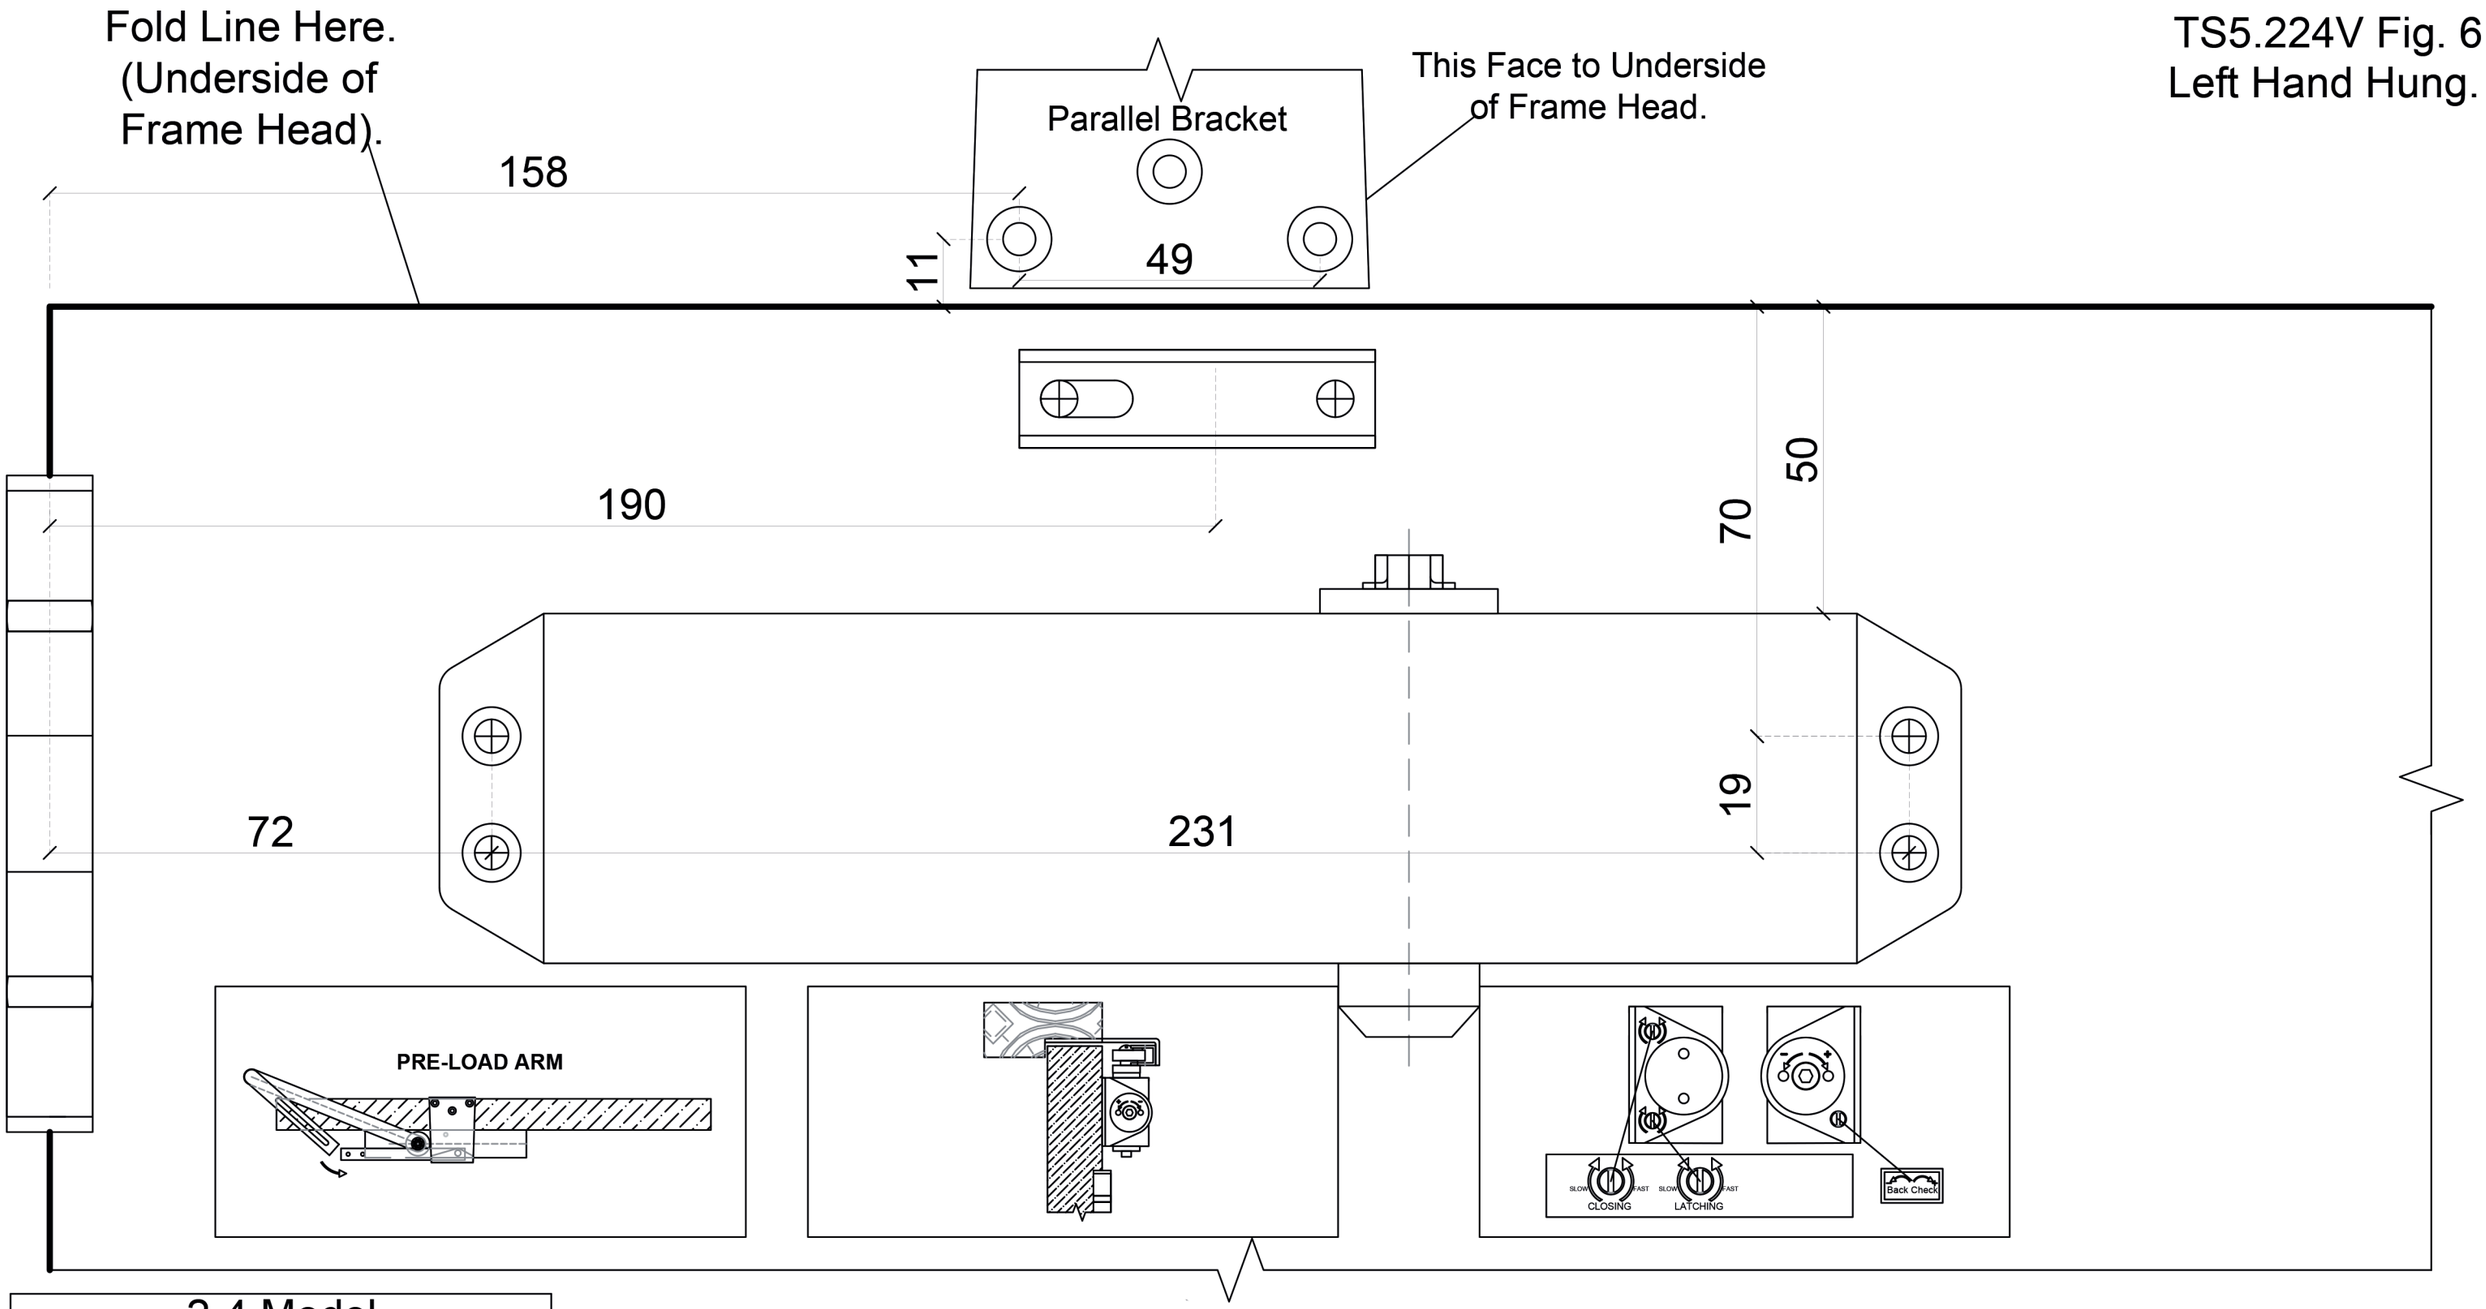


| 2-4 Model | | |
|---|---|---|
| N° of Turns | Direction | Size |
| 3 | - | 2 |
| 0 | * | 3 |
| 3 | + | 4 |

Power Adjustment

* : FACTORY PRE-SET

| EN1154 | | |
|---|---|---|
| Door Closer Power Size | Recommended Door Leaf Width Max mm | Test Door Mass (Kg) |
| 1 | 750mm | 20 Kg |
| 2 | 850mm | 40 Kg |
| 3 | 950mm | 60 Kg |
| 4 | 1100mm | 80 Kg |
| 5 | 1250mm | 100 Kg |
| 6 | 1400mm | 120 Kg |

certifire
Certifire Approved CF689
120 Minutes Timber

boss door controls

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| CE | Boss Door Controls Ltd<br>3 & 4 Rutherford Square<br>Brucefield Industry Park<br>LIVINGSTON, West Lothian<br>EH54 9BU, United Kingdom | BOSS TS5.224V<br>2019 | | | | | |
| 1121-CPR-AD5423 | FIG 6 EN 1154:1996+A1:2002/2006 | 3 | 8 | 3/4 | 1 | 1 | 3 |

TS5.224V Fig. 6
Right Hand Hung.

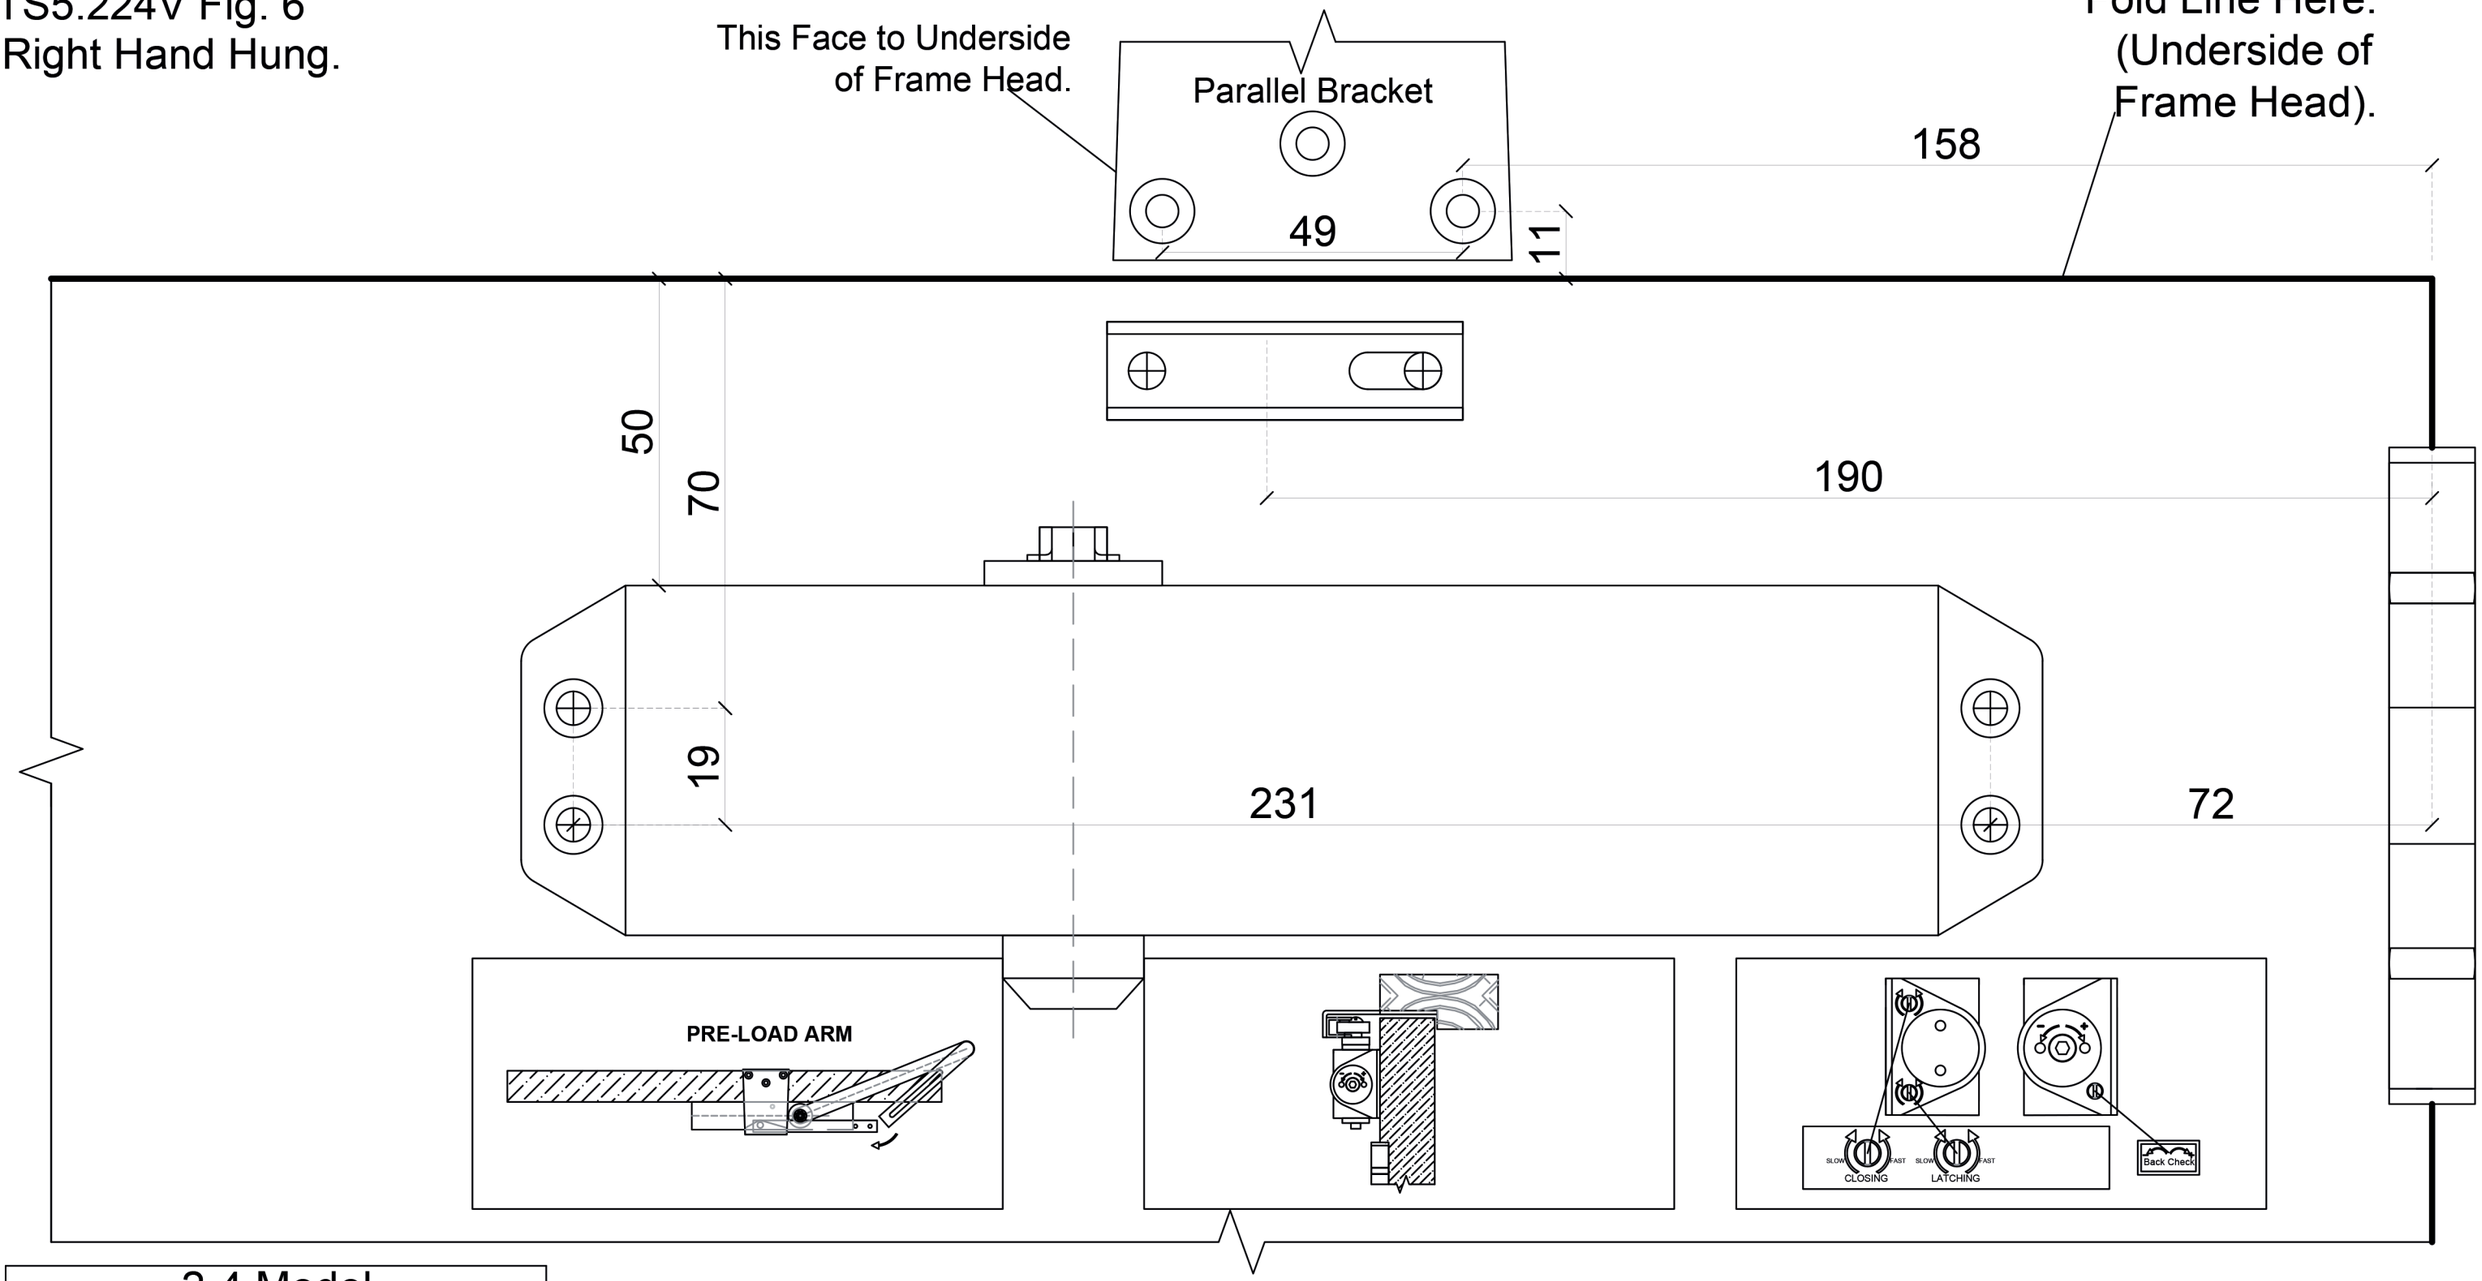


| 2-4 Model | | |
|---|---|---|
| N° of Turns | Direction | Size |
| 3 | - | 2 |
| 0 | * | 3 |
| 3 | + | 4 |




Power Adjustment

* : FACTORY PRE-SET

| EN1154 | | |
|---|---|---|
| Door Closer Power Size | Recommended Door Leaf Width Max mm | Test Door Mass (Kg) |
| 1 | 750mm | 20 Kg |
| 2 | 850mm | 40 Kg |
| 3 | 950mm | 60 Kg |
| 4 | 1100mm | 80 Kg |
| 5 | 1250mm | 100 Kg |
| 6 | 1400mm | 120 Kg |

certifire
Certifire Approved CF689
120 Minutes Timber

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| CE | Boss Door Controls Ltd<br>3 & 4 Rutherford Square<br>Brucefield Industry Park<br>LIVINGSTON, West Lothian<br>EH54 9BU, United Kingdom | BOSS TS5.224V<br>2019 | | | | | |
| 1121-CPR-AD5423 | FIG 6 EN 1154:1996+A1:2002/2006 | 3 | 8 | 3/4 | 1 | 1 | 3 |

boss door controls