58 -28 48587766 (A)

Fold Line Here. (Underside of Frame Head).

Left Hand Hung.

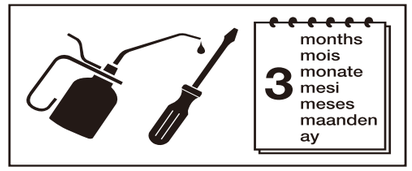

This Template Covers Parallel Arm Installation to 105°

2-4 Model		
N° of Turns	Direction	Size
3	-	2
0	*	3
3	+	4

Power Adjustment

* : FACTORY PRE-SET

CE 2812-CPR	Boss Door Controls Ltd 3-4 Rutherford Square Buncefield Industry Park Livingston EN54 9BU Scotland	TS5.224V certifire CF689						UKCA 1121-CPR	
AD5423	20	FIG 1 EN 1154:1996+A1:2002	4	8	2/4	1	1	3	AD - UK AD8019	22
		FIG 6 EN 1154:1996+A1:2002	3	8	3/4	1	1	3		

EN1154		
Door Closer Power Size	Recommended Door Leaf Width Max mm	Test Door Mass (Kg)
1	750mm	20 Kg
2	850mm	40 Kg
3	950mm	60 Kg
4	1100mm	80 Kg
5	1250mm	100 Kg
6	1400mm	120 Kg

warringtonfire certifire CERTIFICATION

APPROVED PRODUCT CF689

boss door controls

48587766 (A)

Right Hand Hung.

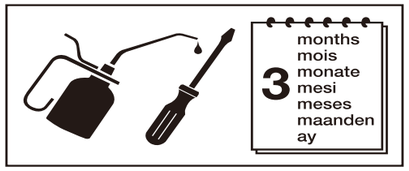

This Face to Underside of Frame Head.

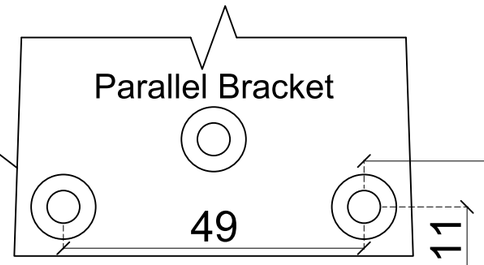

Fold Line Here. (Underside of Frame Head).

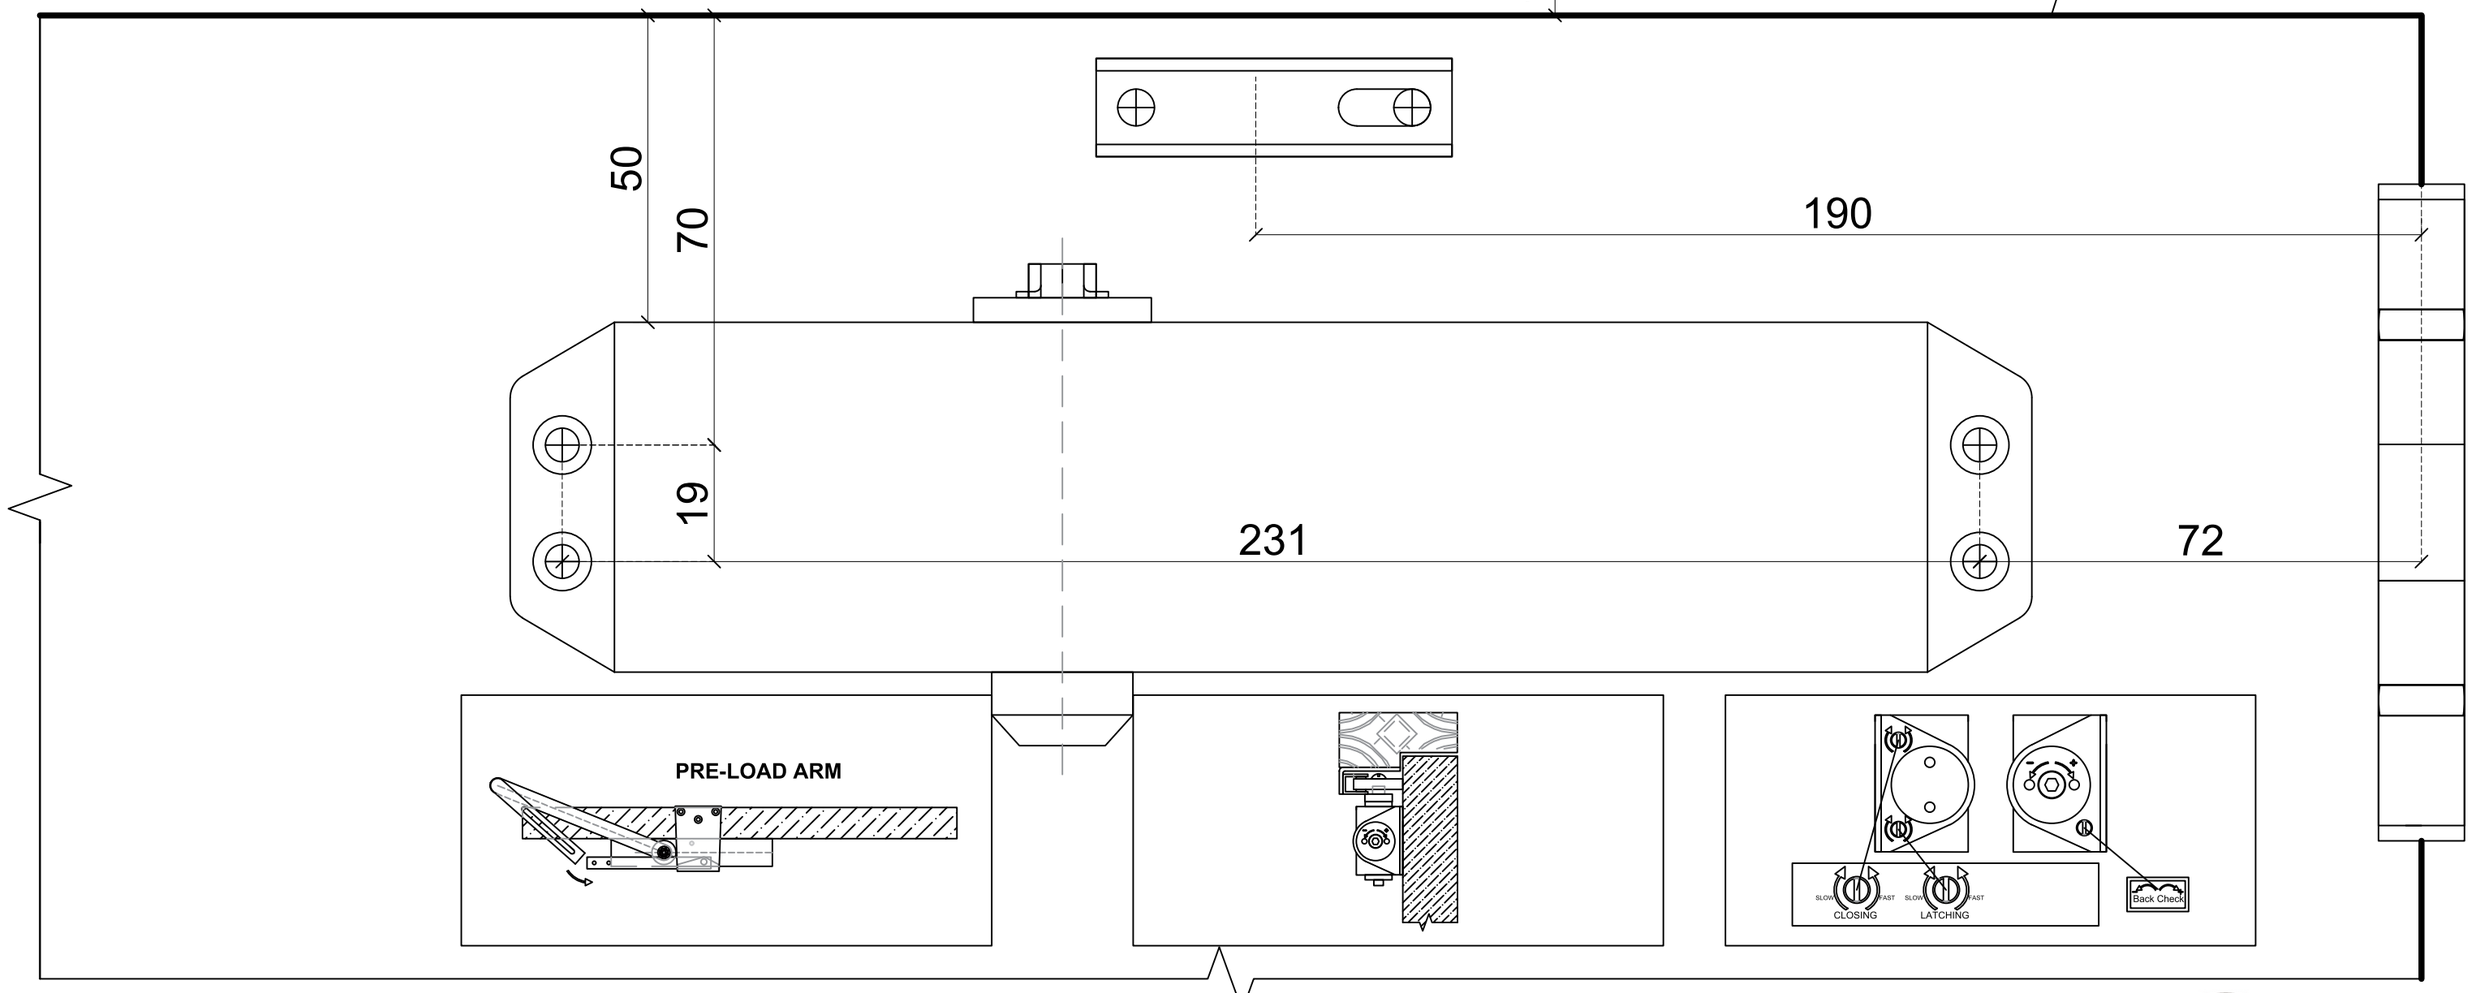

This Template Covers Parallel Arm Installation to 105°

2-4 Model		
N° of Turns	Direction	Size
3	-	2
0	*	3
3	+	4



Power Adjustment

* : FACTORY PRE-SET

CE 2812-CPR		Boss Door Controls Ltd 3-4 Rutherford Square Buncefield Industry Park Livingston EN54 9BU Scotland	TS5.224V certifire CF689						UKCA 1121-CPR	
AD5423	20	FIG 1 EN 1154:1996+A1:2002	4	8	2/4	1	1	3	AD - UK AD8019	22
		FIG 6 EN 1154:1996+A1:2002	3	8	3/4	1	1	3		

EN1154		
Door Closer Power Size	Recommended Door Leaf Width Max mm	Test Door Mass (Kg)
1	750mm	20 Kg
2	850mm	40 Kg
3	950mm	60 Kg
4	1100mm	80 Kg
5	1250mm	100 Kg
6	1400mm	120 Kg

warringtonfire certifire CERTIFICATION

APPROVED PRODUCT CF689

boss door controls