boss door controls

EN Size 3-4

1100mm (max door width)

80kg (max door weight)

GUARANTEE 2 Years

TS7.004 - Dual Function Hold Open & Swing Free EMAG

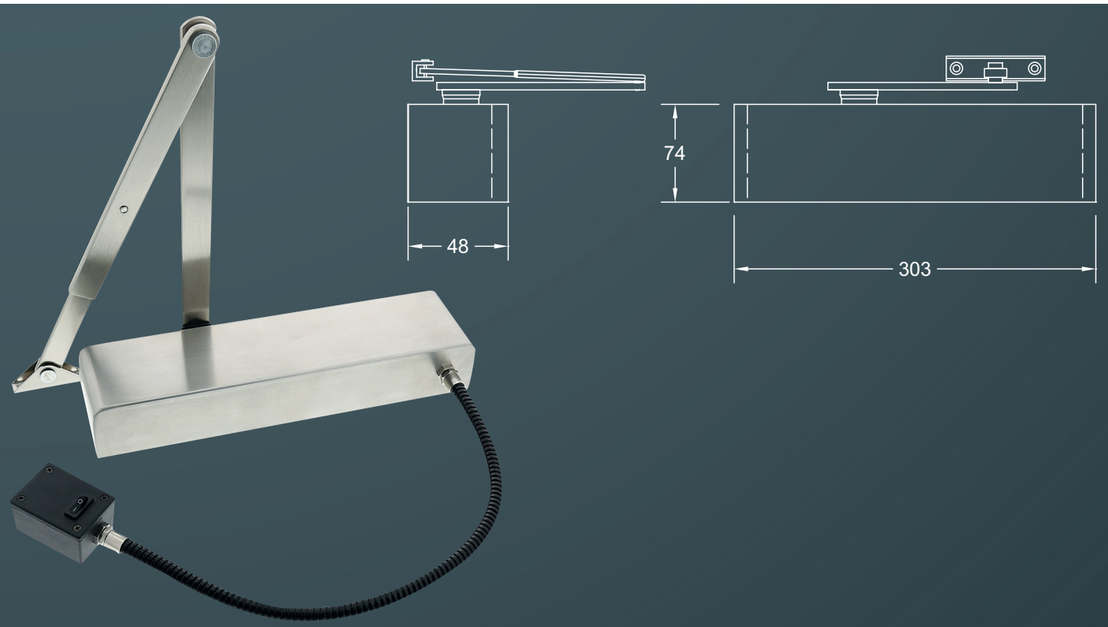

Product Overview:

A truly universal Electro-Magnetic door closer with all options in one unit. Suitable for most applications particularly those with public use.

Electrical Details:
Current Draw: 85 Milliamp
Voltage: 24v DC

Testing & Standards

- CE marked against EN1154 EN1155
- Included in successful fire test to EN1634-1
- Suitable for use on timber fire doors of up to 120 minutes fire resistance
- Certifire approved - refer to CF5023 for scope of approval
- Safe in use
- High corrosion resistance

BS8300 - Approved Document M

The TS7.004 Overhead door closer has hold-open and swing-free functions making it suitable for use in applications where ease of access is important and compliance with the requirements of The Equalities Act. There is no minimum door size for the TS7.004 to help meet the requirements laid down by The Equalities Act.

www.**bossdoorcontrols**.com

Specification		TS7.004
Closing force (Fig 1)	EN size	3-4
Door size (max)	Width (mm)	1100
	Weight (kg)	80
Door size (min)	Width (mm)	395
Body dimensions	Length (mm)	273
	Height (mm)	58
	Depth (mm)	44
Application	Pull side fig 1	✓
	Push side fig 6	✓
	Transom fig 61	✓
Mechanism	Rack & pinion	✓
Power shoe bracket		✓
Angle of opening	Fig 1/Fig 61 - EN 3	180°
	Fig 1/Fig 61 - EN 4	110°
	Fig 66 - EN 3	170°
Non handed		✓
Adjustable sweep speed		✓
Adjustable latch speed		✓

Options	TS7.004
Extra long loop	✓
Power Supply Units, 2 Amp & 4 Amp	✓

Cover options	TS7.004
Semi-radius	✓

Finish options		TS7.004
Cover & matching sissor arm	SIL	✓
	SSS	✓
	PB	✓
	PSS	✓
	RAL/Lacquered	✓
	Special plated finishes	✓

Tested to EN1154 & EN1155	TS7.004
3 8 4/3 1 1 3	- fig.1
3 8 3 1 1 3	- fig.6
3 8 4/3 1 1 3	- fig.61

CE certificate

UKCA certificate



Certifire certificate

Finishes

Silver

Choice of 3 brass finishes

SSS

Choice of RAL finishes

PSS

Choice of 6 bronze finishes

Cover options

Semi radiused cover
L:303 x H:74 x D:48mm