(51)-22 48587764 (A)

Left Hand Hung.



Fold Line Here.
(Underside of
Frame Head).

2-6 Model		
N° of Turns	Direction	Size
0	*	4
3	+	5
8	+	6



Power Adjustment

* : FACTORY PRE-SET

This Template Covers Parallel Arm Installation to 105°

EN1154		
Door Closer Power Size	Recommended Door Leaf Width Max mm	Test Door Mass (Kg)
1	750mm	20 Kg
2	850mm	40 Kg
3	950mm	60 Kg
4	1100mm	80 Kg
5	1250mm	100 Kg
6	1400mm	120 Kg

APPROVED PRODUCT
CF689

CE 2812-CPR		Boss Door Controls Ltd 3-4 Rutherford Square Buncefield Industry Park Livingston EN54 9BU Scotland	TS5.226 certifire CF689						UKCA 1121-CPR	
AD5424	20	FIG 1 EN 1154:1996+A1:2002	4	8	3/6	1	1	3	AD - UK AD8023	22
		FIG 6 EN 1154:1996+A1:2002	3	8	3/5	1	1	3		

boss door controls

48587764 (A)

Right Hand Hung.



This Face to Underside of Frame Head.

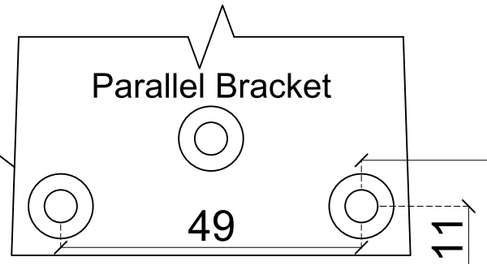

Fold Line Here. (Underside of Frame Head).

158

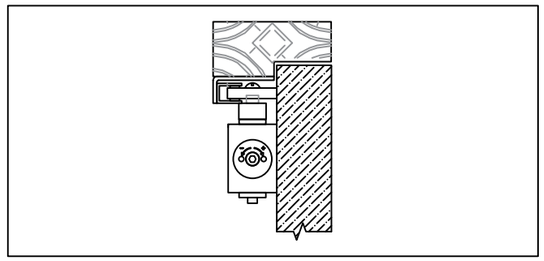

59.5

50



190

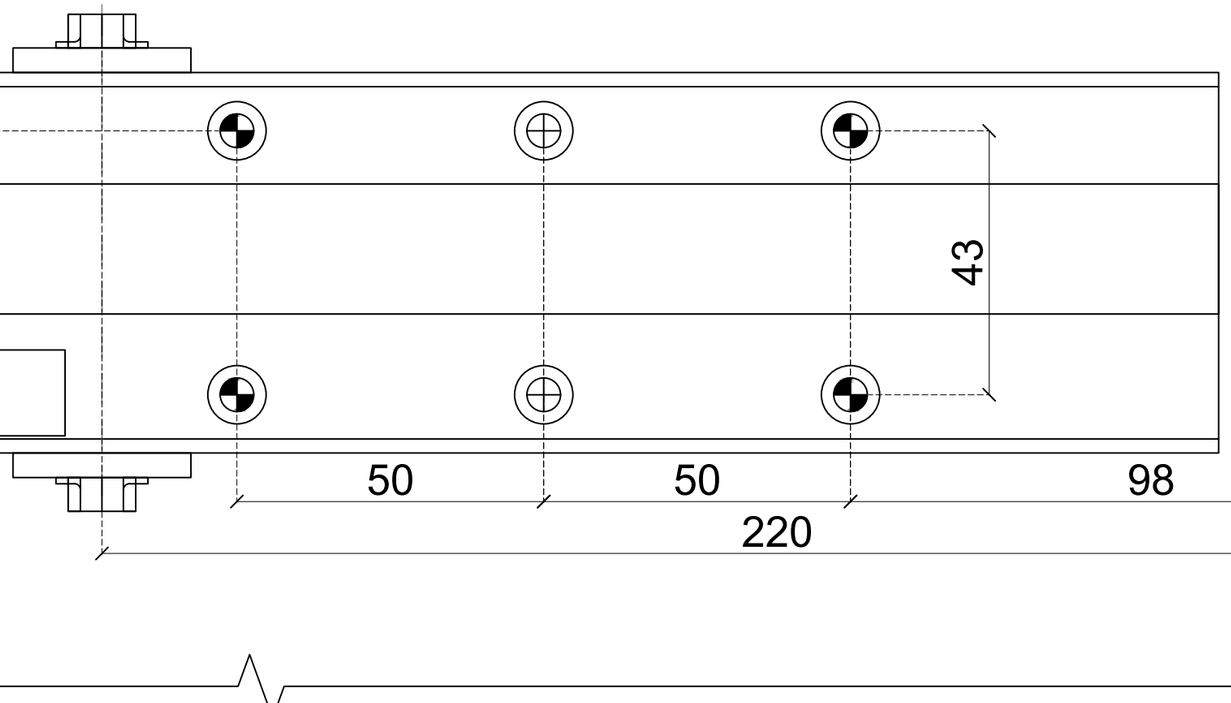

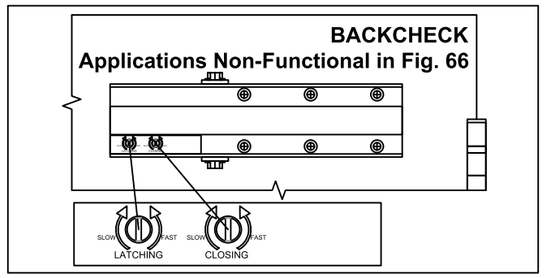

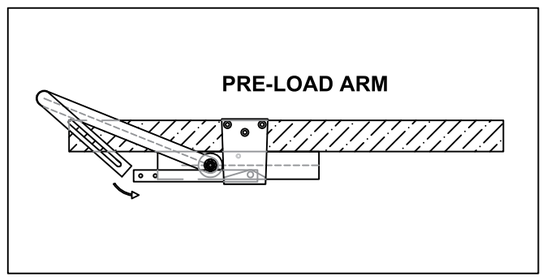

2-6 Model		
N° of Turns	Direction	Size
0	*	4
3	+	5
8	+	6



Power Adjustment

* : FACTORY PRE-SET

This Template Covers Parallel Arm Installation to 105°

EN1154		
Door Closer Power Size	Recommended Door Leaf Width Max mm	Test Door Mass (Kg)
1	750mm	20 Kg
2	850mm	40 Kg
3	950mm	60 Kg
4	1100mm	80 Kg
5	1250mm	100 Kg
6	1400mm	120 Kg

CE 2812-CPR		Boss Door Controls Ltd 3-4 Rutherford Square Buncefield Industry Park Livingston EN54 9BU Scotland	TS5.226 certifire				CF689		UK CA 1121-CPR	
AD5424	20	FIG 1 EN 1154:1996+A1:2002	4	8	3/6	1	1	3	AD - UK AD8023	22
		FIG 6 EN 1154:1996+A1:2002	3	8	3/5	1	1	3		

warringtonfire certifire CERTIFICATION

APPROVED PRODUCT
CF689

boss door controls